Dutputs











Series Model

Robot SLAM RobotSLAM basic, RobotSLAM standard, RobotSLAM professional 16-channel^①

Laser Scanner Measurement Rate Max. 320,000 points/sec^① Laser Safety Class

Laser Wavelength 905 nm 8-bit, dual returr Echo Mode 0.05-120 m Measuring Range

Scanning Rate Scanning FOV 10 Hz 360°x 285° Horizontal Angle Resolution

Vertical Angle Resolution Relative Accuracy GNSS Differential^②

Signal Tracking@ RTK Positioning Accuracy[®] CORS Access[®]

Positioning Data Refresh Rate²

Absolute Accuracy² Scanning Principle
Accumulated Mileage Error

Housing Material Weight

Dimension **System Consumption**

Power Supply Battery Unit

Endurance **IP Protection** Temperature

Device Connection Data Storage Data Download

Panoramic Camera Software Package

Processing Method Process Time

Class 1(IEC 60825-1:2014) eye-safe

0.18° (10 Hz)

best up to 1 cm
GPS+Glonass+Beidou+Galileo multi-constellation tracking

555 channels RMS 1 cm+1 ppm

nano SIM card slot built in

max. 100 Hz best up to 3-5 cm

laser sensor 360°mechanical rotation

0.1%-0.2% (under the condition without loop closure)

aviation-grade aluminum, with high protection level and anti-inference capability 1.9 kg (handheld only)

262x230x146 mm

dual external Li-ion battery, hot swappable DC 14.4V,6875mAh,99Wh

single battery ≥2 hours, dual batteries ≥4 hours

-20~65°C (operating), -40~85°C (storage)

Wi-Fi or Ethernet cable built-in SSD, 512GB (extendable upon request); SD card (removable), 128GB via Ethernet cable, WiFi or SD card

2-lens, fisheye, 360°, image pixels 18 MP, video pixels 5.7k RobotSLAM Palm (smartphone APP), RobotSLAM Engine (PC)

post-processing on PC approx. 1-2 times of data acquisition

① to expect higher point rate like 640,000 points/sec max., 32-channel laser sensor is also available upon request, and that's RobotSLAM Plus series.

② GNSS differential performance is only applicable to the standard and professional versions. In outdoor scenes with moderate satellite signals coverage, it is recommended to activate GNSS RTK for positioning, which may help much to eliminate control points record and measurement.

Options

| Model | | RobotSLAM basic | C | RobotSLAM standard | RobotSLAM professional |
|-------------------------------------|----------|-----------------|--------|--------------------|------------------------|
| Handheld Components | | √ | All In | √ | √ |
| Control Point Record Button | 1 | √ | | √ | √ |
| Built-in GNSS Module | | _ at _ at | | √ | √ |
| GNSS Antenna | | | | √ | √ |
| LED Screen | 1 | \checkmark | 100 | √ | √ |
| Smartphone Holder | | √ | | √ | √ |
| Smartphone APP | and a | \checkmark | | √ | √ |
| Pano Camera | | option | | option | option |
| Fill-in Light ^① | Q | option | | option | option |
| Backpack Kit | | | | - | √@ |
| Al Robot Dog Mount Kit ^③ | | | | option | option |
| USV-based Mount Kit ^③ | | | | option | option |
| SUV-based Mount Kit ^③ | | | | option | option |
| UAV-based Mount Kit ^③ | | | | option | option |
| | | | | | |

① fill-in light and 360° pano camera are bundled as a visual module.

② the backpack kit includes a white plate antenna and a longer GNSS antenna cable; the backpack 3-in-1 magic tactically provides two working modes in one package: handheld and backpack, plus the storage function. No carrying case or trolley suitcase needec

③ Al Robot Dog Mount kit, USV-based Mount kit, SUV-based Mount kit and UAV-based Mount kit are all optional accessories, available upon request.



SOUTH SURVEYING & MAPPING TECHNOLOGY CO., LTD.

Add: South Geo-information Industrial Park, No. 39 Si Cheng Rd, Guangzhou, China get yoursuccess Tel: +86-20-23380888 Fax: +86-20-23380800 E-mail: mail@southsurvey.com export@southsurvey.com http://www.southinstrument.com

dealer info



ROBOT SLAM

A Survey-grade SLAM **Handheld**

direct geo-referencing amazing cm-level accuracy backpack 3-in-1 magic abundant software functions

(V. 202305)

Illustration

GCP record buttor

helps to record control point directly when not connected to APP

nain control butt to start/stop scans

and initialize, status identified by LED

fill-in light (option

supplements lighting when working in the dark or recording pano

2-lens fisheye and 18MP, captures left&right for less

collaborates with onboard GNSS to provide centimeter level positioning

SIM card slot

Nano SIM card to

fit, supports CORS

helps to record GCPs

and ready for fitting

fill-in light kit

network access

LED screen device status and

commands to display, interactive and practical

target base plate

128GB default, extendable to 512GB max., ready for direct

SD card slot

GNSS antenna

range 120m and point rate 640,000 points/sec max.

enables one hand free when another is occupied in peration

handheld grip

left and right to fit smartphone holder for checking at ease

Platforms



Handheld

ready to work in indoor, outdoor and underground environments



USV-based

to scan shoreside and integrate with underwater topography



Backpack

easy to carry and well fits long-time working indoors and outdoors



SUV-based

mounted onto a car for entry-level automobile mapping



Al Robot Dog


wireless remote scanning of potentially hazardous zones



UAV-based

aerial perspective to scan building top which handheld mode cannot

Backpack 3-in-1

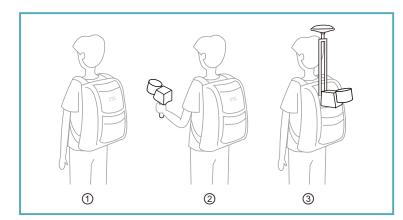



- no hand carry no pulling on the ground \rightarrow



when 3 becomes 1

- ① storage packing
- ② handheld mode 3 backpack mode

APP&Software



Smartphone APP-RobotSLAM Palm

- CORS settings
- status display
- fieldwork control

- task timer
- storage info
- device registration

Post Processing Software-RobotSLAM Engine

- coordinate system transformation
- auto/manual optimization
- instant loading of mass data
- H.&V. accuracy verification
- loop closure review
- enable RTK for adjustment
- point cloud classification
- processing replay

- point rendering
- 3D measurement
- pano overlay display
- global registration
- auto denoising
- sectional view
- X-ray rendering

Computer Configuration

| Requirement | Minimum | Recommended | | | |
|-----------------|---|---------------------------------------|--|--|--|
| OS | Windows10/Windows11 64-bit | | | | |
| Graphics Card | GTX-3060/RX6600M or above (NVIDIA series recommended) | | | | |
| CPU | Intel i7-11800H/AMD R7-5800H or above | Intel i7-12700H/AMD R7-6800H or above | | | |
| Internal Memory | 16GB or above | 32GB or above | | | |
| SSD | 1TB or above | 2TB or above | | | |

Note: for faster data loading, it's recommended to process the data directly with SSD instead of HDD.

Unboxing




- B GNSS antenna & cable A handheld (handle, base plate)
- smartphone holder nain cable
- G rechargeable battery Ethernet cable
- R micro SD card
- M cleaning cloth pano camera (option)
- shoulder strap
- **battery** compartment 🕕 battery charger & cable
- USB flash drive SD card reader
- N hand-carry case 1 P fill-in light & charging cable 1

Note: the above is applicable for RobotSLAM standard only. Please refer to the configuration list for more details of different models.

Applications

Underground Mining








Building Elevational Surveying








Basement Parking Digitization








Forestry Investigation








Stockpile Volume Calculation







Shoreside Survey + USV Bathymetry



